

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>MAR 2015</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2015 to 00-00-2015</b>	
4. TITLE AND SUBTITLE <b>The Effects of Lamp Spectral Distribution on Sky Glow over Observatories</b>			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>U.S. Naval Observatory Flagstaff Station,,Flagstaff,,AZ</b>			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>Highlights of Astronomy, Volume 16 XXVIIIth IAU General Assembly, August 2012 T. Montmerle, ed.</b>					
14. ABSTRACT <b>Using a wavelength-generalized version of the Garstang (1991) model, we evaluate overhead sky glow as a function of distance up to 300 km, from a variety of lamp types, including common gas discharge lamps and several types of LED lamps. We conclude for both professional, and especially cultural (visual), astronomy, that low-pressure sodium and narrowspectrum amber LED lamps cause much less sky glow than all broad-spectrum sources.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>2</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

# The Effects of Lamp Spectral Distribution on Sky Glow over Observatories


C. B. Luginbuhl<sup>1</sup>, P. A. Boley<sup>2</sup>, D. R. Davis<sup>3</sup> and D. M. Duriscoe<sup>4</sup>

<sup>1</sup>U.S. Naval Observatory Flagstaff Station, Flagstaff, Arizona, U.S.A. email: [cbl@nobs.navy.mil](mailto:cbl@nobs.navy.mil) <sup>2</sup>Max-Planck-Institut für Astronomie, Heidelberg, Germany <sup>3</sup>Planetary Science Institute, Tucson, Arizona, U.S.A. <sup>4</sup>National Park Service, Bishop, California, U.S.A.

**Abstract.** Using a wavelength-generalized version of the Garstang (1991) model, we evaluate overhead sky glow as a function of distance up to 300 km, from a variety of lamp types, including common gas discharge lamps and several types of LED lamps. We conclude for both professional, and especially cultural (visual), astronomy, that low-pressure sodium and narrow-spectrum amber LED lamps cause much less sky glow than all broad-spectrum sources.

**Keywords.** atmospheric effects, scattering, site testing

We have modified the Garstang (1991) model to include wavelength-dependent scattering and absorption. We evaluate overhead ( $z \leq 60^\circ$ ) sky glow at distances from 0.1-300km from low-pressure sodium (LPS), amber LED (ALED; peak 590nm, FWHM 15nm), high-pressure sodium (HPS), white LED with CCT of 2400K (wLED) and 5100K (cLED), metal halide with CCT of 4100K (MH), and a white LED with a 500nm filter (FLED). All lamp types are set to emit equal luminous flux. Results are summarized in Fig. 1.

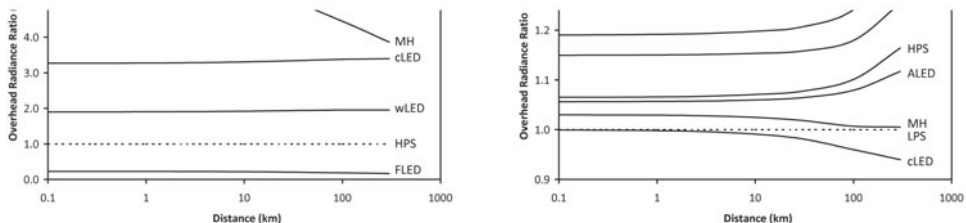

**Figure 1.** Ratio of overhead radiant sky glow as a function of distance. The left panel, relative to HPS, is for  $\lambda 350\text{-}500\text{nm}$  (LPS/ALED have no emission here); the right panel, relative to LPS, is for  $\lambda 500\text{-}650\text{nm}$ . (Does not include natural sky glow)

In the range  $\lambda 500\text{-}650\text{nm}$ , wLED and FLED cause 15-35% more overhead radiant sky glow (RSG) than LPS or ALED. Increased scattering at short wavelengths is balanced by increased extinction when observed from  $< 10\text{km}$ . At greater distances, RSG from MH and cLED decreases relative to LPS, while that from wLED, FLED and HPS increases. In the range  $\lambda 350\text{-}500\text{nm}$ , wLED, cLED and MH contribute  $\sim 2\text{-}5\times$  more to the RSG than HPS. FLED has reduced blue RSG compared to broad-spectrum sources, but substantially greater blue and red RSG than LPS/ALED, especially at large distances.

Due to the Purkinje shift, narrow-spectrum yellow sources like LPS cause dramatically less visible sky glow ( $1/2 - 1/9$ ) than all broad-spectrum sources, including FLED.

## References

Garstang, R. H. 1991, *PASP*, 103, 1109